



INSTALLATION INSTRUCTIONS

Components List:


- BM-TWP Ball Check Valve Jets
- MANI-SD-A Security Device
- MAN-A-4-AC Manifold
- Silver SLS+ Variable Speed Blower

Install blower behind a wall (with an access panel) or in a closet. Blower can also be installed under floor. Ensure the Security device, MANI-SD-A, is at least 2" above the bottom of overflow hole. Security device and hose can be mounted in wall.

Raye

Hammered Copper Double Slipper Air Tub on Plinth

Installation shown is typical.

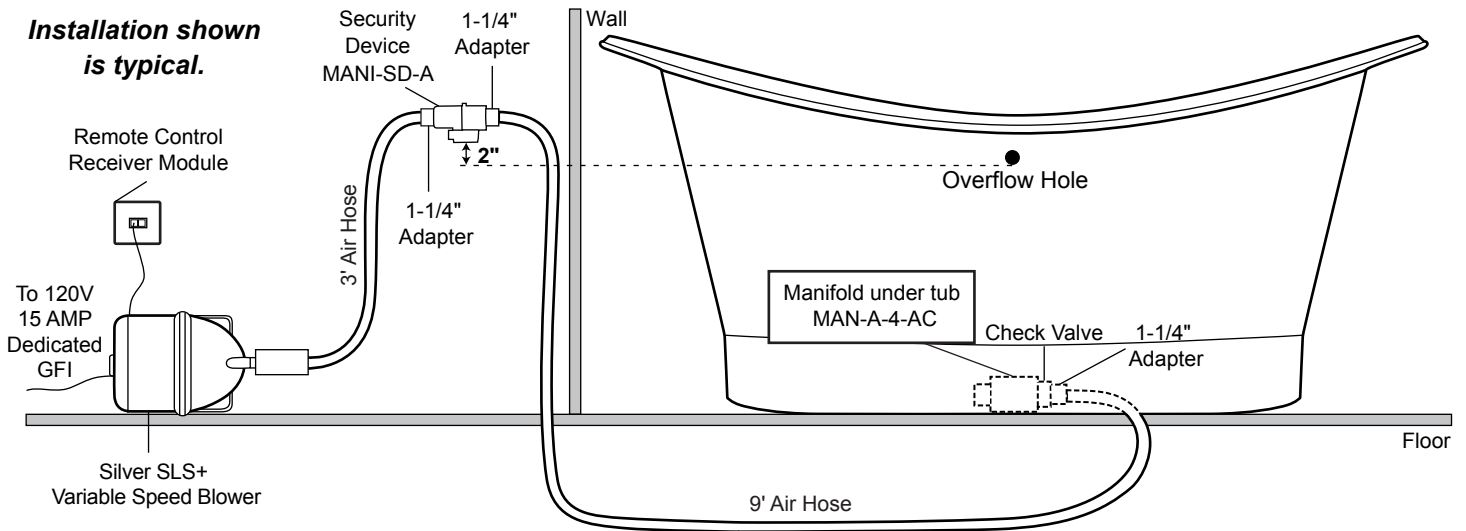

INSIDE OF BATH TUB

Features:

- (12) Maxi Air Jets with 24 openings




Elbows for air jets Tees for air jets

- Remote Control CG+/RTC-SENSOR-WP



12-15 year battery life

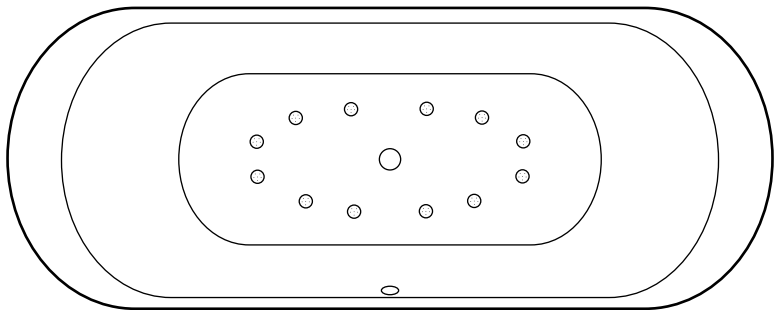



SPECIFICATIONS

Overall Dimensions	71" L x 33-3/4" W (front to back) x 33" H
Water Capacity	
without overflow	N/A
with overflow	67 gallons
Water Depth	
to top of tub	N/A
to overflow	14-1/4"
Tub Weight Uncrated	111 lbs.
Tub Rim	N/A
Faucet Configurations	no faucet drillings

71" Raye

Hammered Copper Double Slipper Air Tub on Plinth

All measurements are approximate. Measurements may vary +/- 1".

