



INSTALLATION INSTRUCTIONS


Components List:

- BM-TWP Ball Check Valve Jets
- MANI-SD-A Security Device
- MAN-A-4-AC Manifold
- Silver SLS+ Variable Speed Blower

Winifred

Resin Freestanding Double-Ended Slipper Air Tub

Install blower behind a wall (with an access panel) or in a closet. Blower can also be installed under floor. Ensure the Security device, MANI-SD-A, is at least 2" above the bottom of overflow hole. Security device and hose can be mounted in wall.

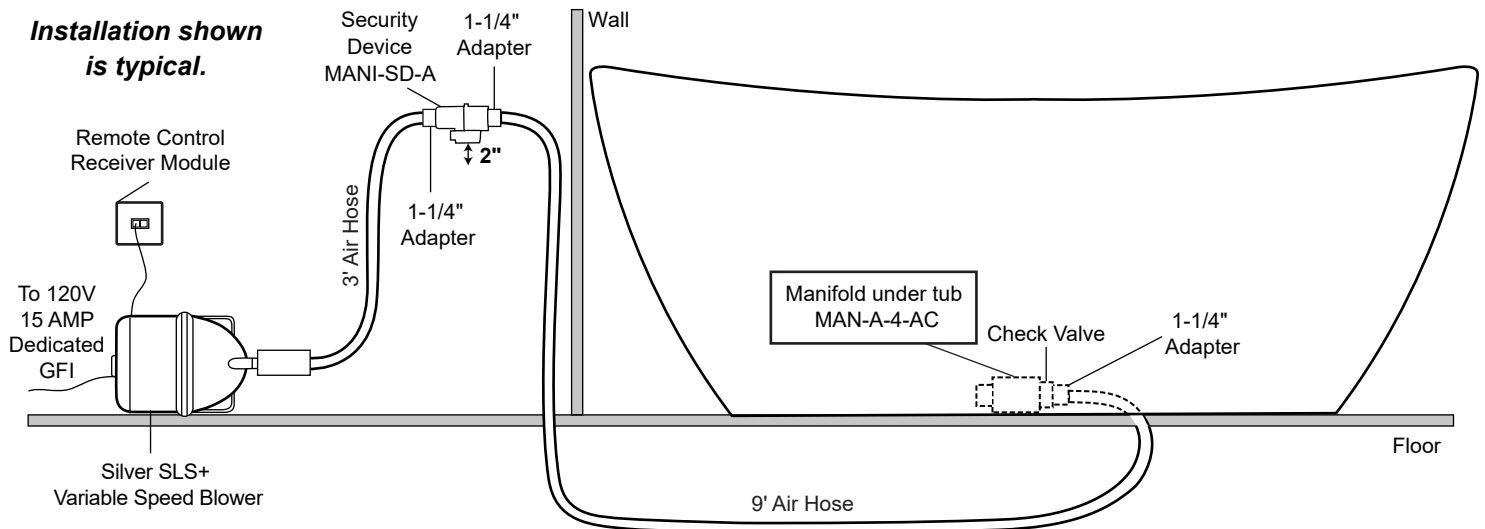

INSIDE OF BATH TUB

Features:

- (12) Maxi Air Jets with 24 openings



Elbows for air jets




Tees for air jets

- Remote Control CG+/RTC-SENSOR-WP



12-15 year battery life

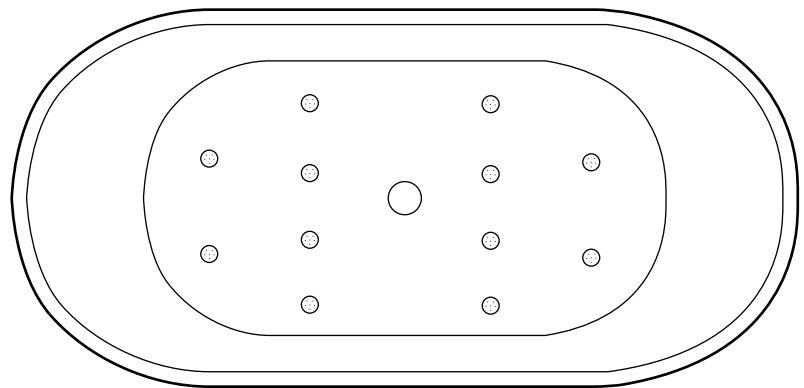




SPECIFICATIONS

Overall Dimensions	64" L x 31-1/2" W (front to back) x 25-3/8" H
Water Capacity	
without overflow	93 Gallons
with overflow	75 Gallons
Water Depth	
to top of tub	18" H
to overflow	14-1/2" H
Tub Weight Uncrated	345 lbs
Tub Rim	1" wide
Tub Footprint	N/A
Faucet Configurations	No Drillings

64" Winifred

Resin Freestanding
Double-Ended
Slipper Air Tub

All measurements are approximate. Measurements may vary +/- 1".

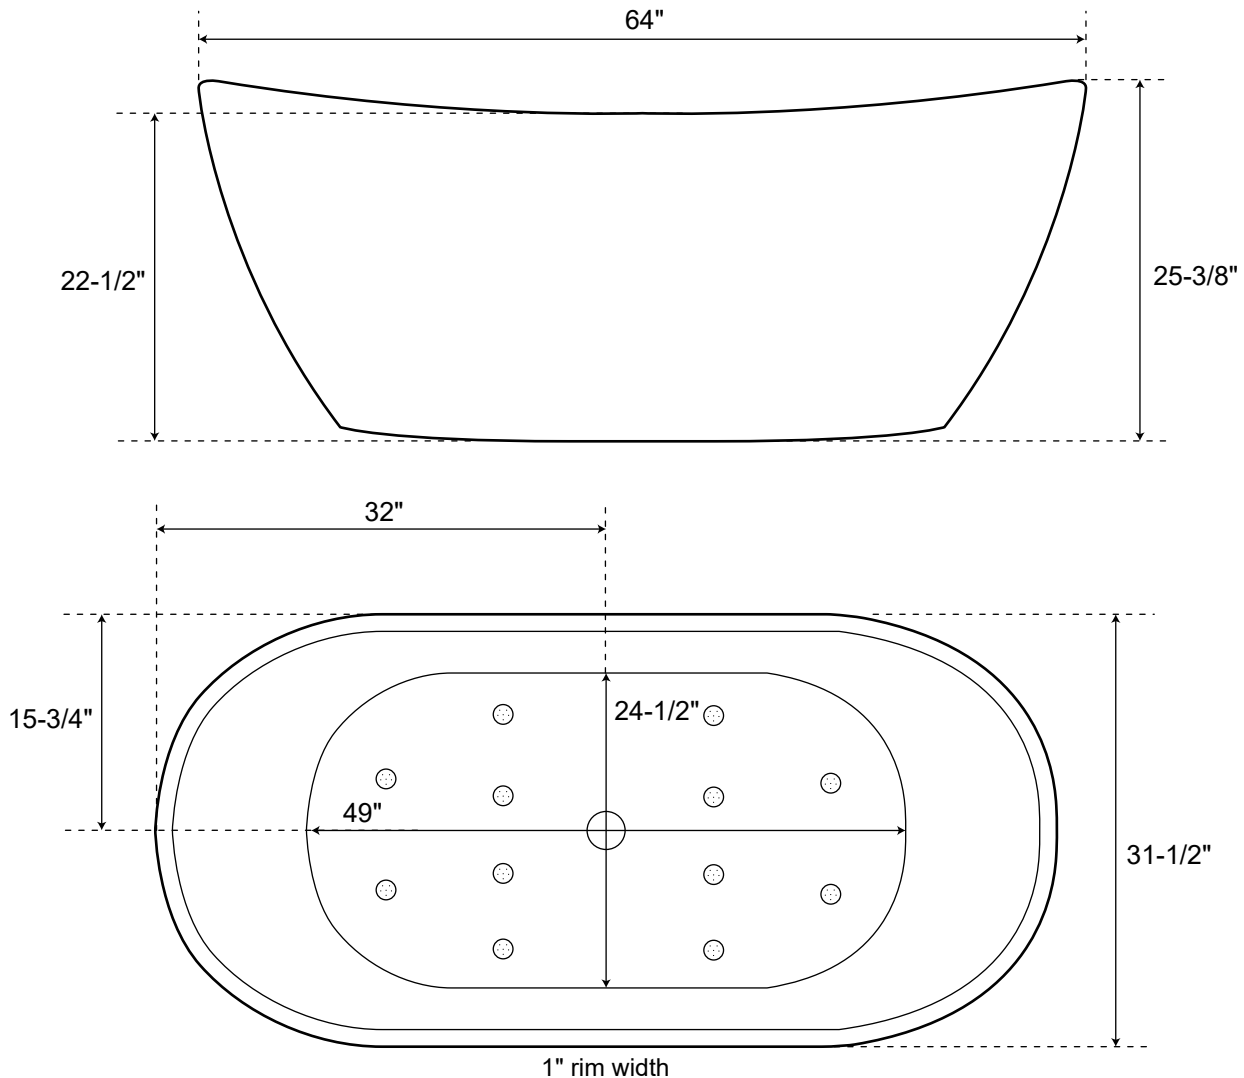




SPECIFICATIONS

Overall Dimensions	71" L x 33-1/4" W (front to back) x 22-3/4" H
Water Capacity	
without overflow	87 Gallons
with overflow	70 Gallons
Water Depth	
to top of tub	15" H
to overflow	12" H
Tub Weight Uncrated	lbs
Tub Rim	1" wide
Tub Footprint	N/A
Faucet Configurations	No Drillings

71" Winifred

Resin Freestanding
Double-Ended
Slipper Air Tub

All measurements are approximate. Measurements may vary +/- 1".

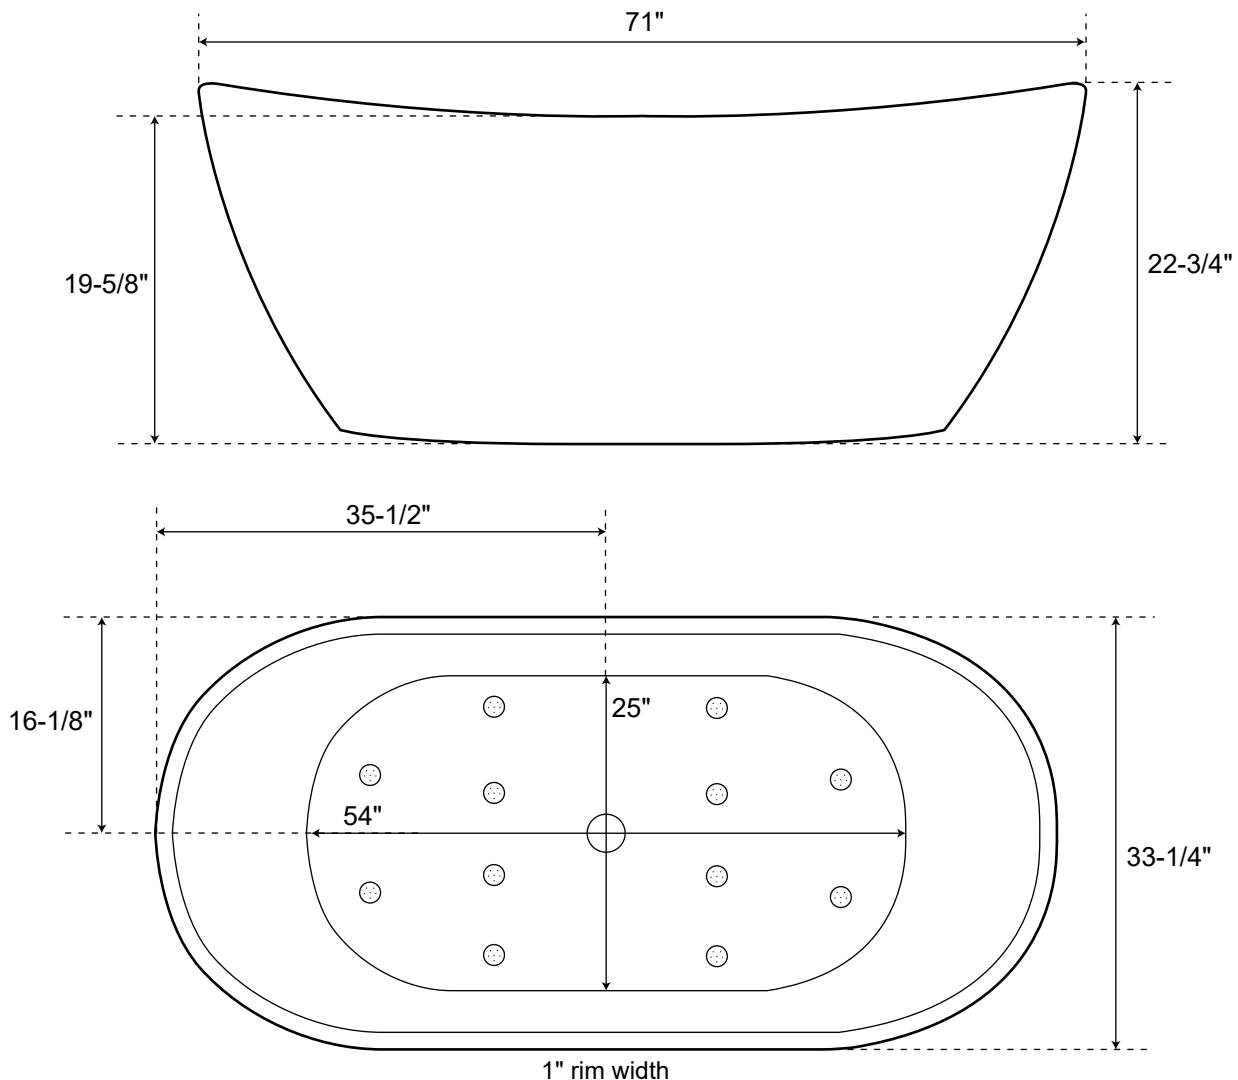



SPECIFICATIONS

Overall Dimensions	56" L x 31-1/2" W (front to back) x 24" H
Water Capacity	
without overflow	75 Gallons
with overflow	61 Gallons
Water Depth	
to top of tub	16-1/2" H
to overflow	13-1/2" H
Tub Weight Uncrated	326 lbs
Tub Rim	1" wide
Tub Footprint	N/A
Faucet Configurations	No Drillings

56" Winifred

Resin Freestanding
Double-Ended
Slipper Air Tub

All measurements are approximate. Measurements may vary +/- 1".

